

# Agilent BenchLink Web Remote Control Software for the PSA Series Spectrum Analyzers ESA-E and ESA-L Series Spectrum Analyzers E7400A Series EMC Analyzers • Option 230

## Technical Overview


### Remote Control Over the Internet

The BenchLink Web Remote Control software is a utility that enables users to remotely control PSA, ESA-E, ESA-L series spectrum analyzers, and E7400A series EMC analyzers over the Internet or your company Intranet<sup>1</sup>. On the analyzer side, the instrument is connected to a local server computer via a GPIB or a LAN interface. The server computer must be connected to the Internet/Intranet. Multiple users can simultaneously access the analyzer from anywhere in the world by using a client computer connected to the Internet/Intranet. No special software is needed on the client side other than a standard web browser such as Microsoft Internet Explorer<sup>®</sup> or Netscape Navigator<sup>®</sup>.

### Applications

The BenchLink Web Remote Control software is very useful in any application requiring remote viewing and control of the spectrum analyzer.

1. The client(s) and server(s) must all reside inside your company Intranet or all be placed on the open Internet for this system to operate correctly. This software does not bypass typical customer firewall security in any way.

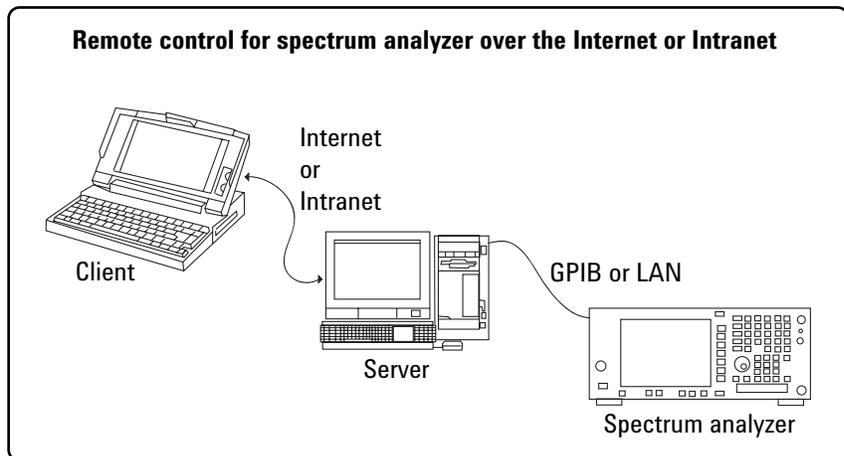

### Signal Monitoring

Regulatory agencies and service providers must often monitor frequency bands to insure the quality and integrity of wireless communication systems. With the BenchLink Web Remote Control software, remote operators can monitor and document activity using a variety of displays – the standard spectrum analyzer display, a “waterfall”, a “spectrogram”, an “analog+” or a “persistence” display.

### CATV Monitoring

CATV fiber hubs are typically situated in scattered locations throughout a city. Save valuable time by installing spectrum analyzers at hub sites and antenna sites, and monitoring activity over the network. The “analog+” display enables both field and manufacturing TV engineers to visualize and document transmitter intermodulation performance and AM linearity.

### Satellite Earth Station Monitoring

Monitor the performance of multiple satellite bands and/or different sites from one convenient location. The “persistence” display emulates a phosphorescent CRT, allowing the engineer to confidently determine persistent signals from occasional ones.

### Manufacturing Process Monitoring

Many electronic manufacturing processes run continuously 24 hours a day, 7 days a week. Engineers must often monitor the progress of a specific test at inconvenient hours. The BenchLink Web Remote Control software makes it possible to do this by using a laptop computer from home or while traveling.



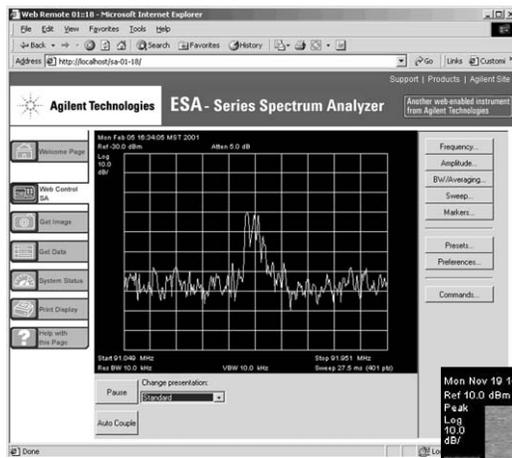


Figure 1 Standard display

## Features

BenchLink Web Remote Control software provides direct control of the following spectrum analyzer functions:

- start/stop frequency
- center frequency/span/zero span
- reference level
- attenuator
- resolution video bandwidth
- video and power averaging
- sweep time and number of sweep points
- factory and user presets
- preferences such as auto align on/off, IF auto ranging on/off
- global auto couple on/off
- markers
- detectors

## In addition

- Users can remotely capture and save snapshots of bit-mapped screen images and frequency/amplitude pairs.
- Up to six user-settable markers unique to each client are available. Marker computation and display are performed on the client's browser to maximize the trace update rate.
- Operators who want to perform more advanced activities can send standard ASCII-based SCPI commands from remote client PC to the spectrum analyzer or other instruments connected to the server.
- User-definable color mapping, continuous tracing, and graphical zooming provide powerful visualization and analysis capability to all engineers.



Figure 2 Spectrogram display

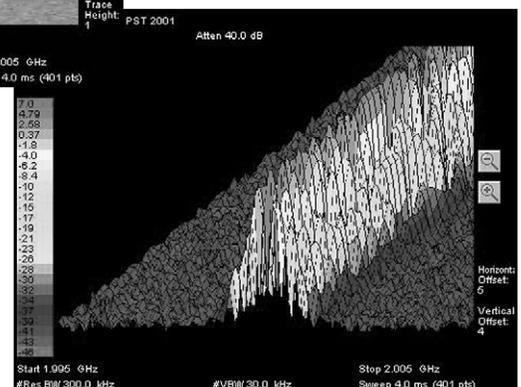


Figure 3 Waterfall display

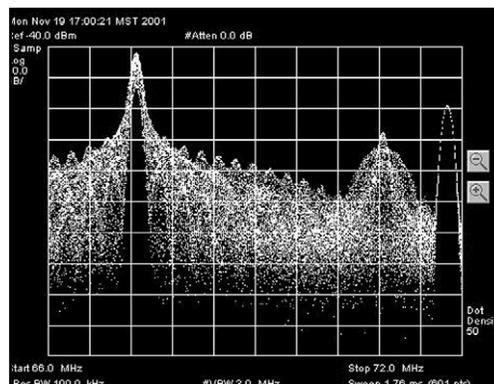


Figure 4 Analog+ display

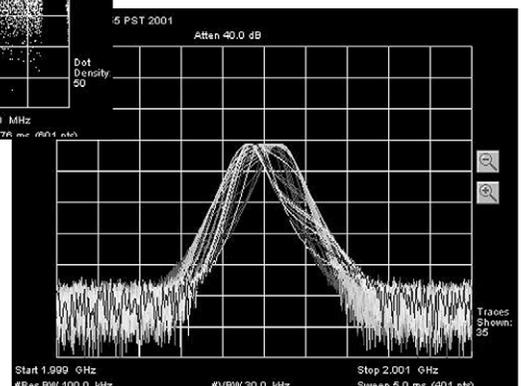


Figure 5 Persistence display

# System Requirements for Revision 1.2

## Server PC minimum requirements

- Computer running Windows® 2000 (Service Pack 4) or Windows XP (Service Pack 2).
  - 180 MHz Pentium II CPU or better.
  - 128 MB RAM or more.
  - 100 MB free disk space.
  - 15" monitor capable of more than 256 colors and at least 1024 x 768 pixels (only required if you want to run a browser client on the server PC itself).
  - Has a working connection to a local area network (LAN), with TCP/IP installed and configured such that it can "ping" all required clients.
  - Desktop PC with at least one free PCI expansion slot that is capable of containing a supported PCI-GPIB card (see supported PCI-GPIB interface cards below).
- OR
- Laptop computer with at least one free PCMCIA slot that is capable of containing a PCMCIA-GPIB card (see supported PCMCIA-GPIB interface cards below).
- OR
- PC configured to control a LAN-GPIB gateway(s). These gateways can be connected to the spectrum analyzer to allow remote connectivity over TCP/IP networks. See supported LAN-GPIB gateways below.

## Client PC minimum requirements

- Desktop or laptop computer running Windows 95/98/Me/2000/NT 4.0/XP or better.
- Intel Pentium® CPU or better.
- Has a working connection to a local area network (LAN), with TCP/IP installed and configured such that it can "ping" all required servers. (Note that neither "ping" nor a browser can connect to a server inside an organization's firewall if that client's PC is not also inside the same firewall).
- 15" monitor capable of more than 256 colors and at least 1024 x 768 pixels.
- Either Microsoft Internet Explorer 4.0 with service pack 2 (or later) or Netscape Navigator 4.5 (or later) installed and working.

## PCI-GPIB interface card

- Agilent 82350A PCI-GPIB interface card
- National Instruments® PCI-GPIB interface card

## PCMCIA-GPIB interface card


- ComputerBoards PCM-GPIB PCMCIA interface card with Windows 2000 drivers
- National Instruments PCMCIA-GPIB for Windows 2000 interface card

## LAN-GPIB gateways

- Agilent E2050A
- National Instruments GPIB-ENET
- National Instruments GPIB-ENET/100

Point	Frequency (Hz)	Trace (dBm)	Attenuation (dB)
1	296000000	-67.46	10
2	296020000	-67.46	
3	296040000	-66.2	Center Frequency (Hz)
4	296060000	-67.76	300000000
5	296080000	-67.16	
6	296100000	-66.54	Date/Time
7	296120000	-66.62	Wed Nov 21 16:14:44 PST 2001
8	296140000	-67.54	
9	296160000	-67.44	Instrument Model

(the above mentioned represent a portion of the total possible measurements)

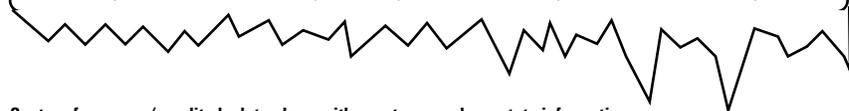

Capture frequency/amplitude data along with spectrum analyzer state information.

## Learn More

For more information, visit our web site at:

[www.agilent.com/find/ESA](http://www.agilent.com/find/ESA)

[www.agilent.com/find/PSA](http://www.agilent.com/find/PSA)



### Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.



### Agilent Direct

[www.agilent.com/find/agilentdirect](http://www.agilent.com/find/agilentdirect)

Quickly choose and use your test equipment solutions with confidence.



### Agilent Open

[www.agilent.com/find/open](http://www.agilent.com/find/open)

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

National Instruments is a registered trademark of National Instruments.

Intel Pentium is a registered trademark of Intel Corporation.

Netscape Navigator is a U.S. trademark of Netscape Communications Corporation.

Windows and MS Windows are U.S. registered trademarks of Microsoft Corporation.

## Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

### Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

### Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

## www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Phone or Fax

#### United States:

(tel) 800 829 4444

(fax) 800 829 4433

#### Canada:

(tel) 877 894 4414

(fax) 800 746 4866

#### China:

(tel) 800 810 0189

(fax) 800 820 2816

#### Europe:

(tel) 31 20 547 2111

#### Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

#### Korea:

(tel) (080) 769 0800

(fax) (080) 769 0900

#### Latin America:

(tel) (305) 269 7500

#### Taiwan:

(tel) 0800 047 866

(fax) 0800 286 331

#### Other Asia Pacific Countries:

(tel) (65) 6375 8100

(fax) (65) 6755 0042

Email: [tm\\_ap@agilent.com](mailto:tm_ap@agilent.com)

Contacts revised: 09/26/05

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2006, 2002, 2001  
Printed in USA, March 3, 2006  
5988-2610EN



Agilent Technologies