Keysight Technologies
N6829BS
Snapshot Radio Software Application

Snapshot Radio Key Features

- Plays a variety of IQ and Audio file types (.cap, .wav, .au, .sdf)
- Provides a variety of demodulation types (AM, FM, USB, LSB, CW)
- Flexible Voice Inversion scheme offers a range of flip frequencies
- Allows the captured file to be saved as a wave (.wav) file
- Displays signal as time or frequency data
- Efficient one click file sorting
- Easy to set up hierarchical sorting
- Plays files while the N6820ES Surveyor 4D continues to record new narrowband files

There are times when I need to take my recordings in the field quickly and sort it out after the fact



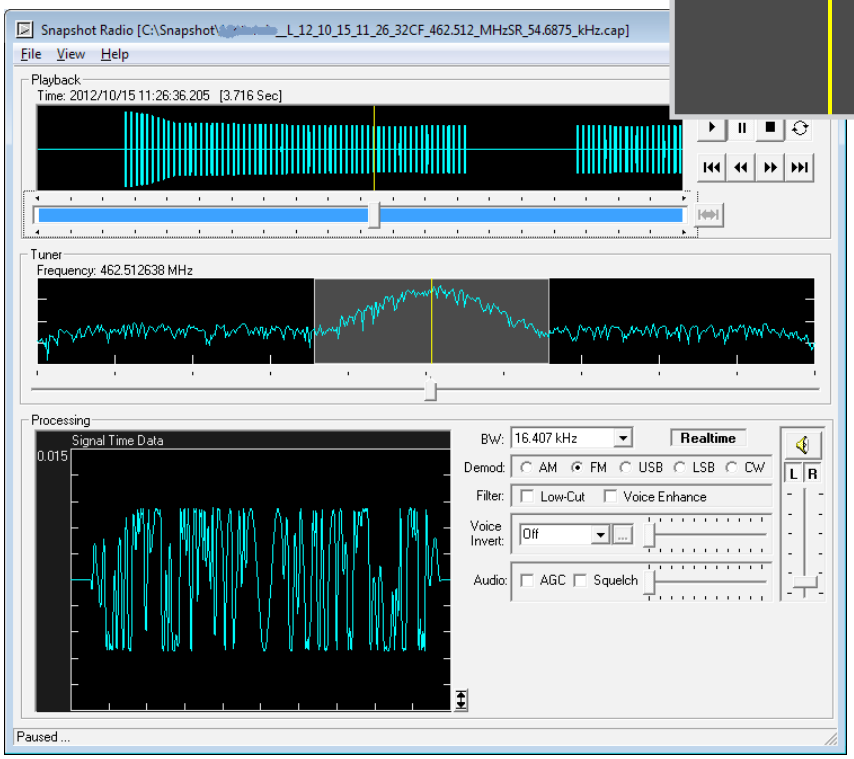

The N6829BS audio player is a stand-alone application that allows you to play-back, sort, delete, and save, IQ files created by applications such as the N6820ES Surveyor 4D or 89600B VSA (Vector Signal Analyzer) software.

The N6829BS audio player executes entirely on a PC and does not require N6820ES Surveyor 4D system hardware or software.

Don't worry if you weren't able to dial in the center frequency exactly right. The N6829BS application allows you to "retune" IQ files during playback and select the best demodulation scheme to either listen to audio or play into a decoding package.

KEYSIGHT TECHNOLOGIES

Maximize Operator Efficiency

Time in the field is extremely valuable and always limited. The N6829BS Snapshot Radio software enables an operator or field technician to focus on survey and data collection while on station knowing they can easily replay recordings after the fact. The N6829BS can demodulate IQ recordings made by either the N6820ES Signal Surveyor 4D or 89601B Vector Signal Analyzer software. It is also able to play a variety of audio format files produced by other receiver assets.

Once the signal data is recorded to a file, reviewers can work at their own pace without risk of losing valuable time or data. Recordings can be edited, filtered and refined for sharing or reporting purposes.

Recordings can be demodulated by the N6829BS software and evaluated for voice or data content. For data recordings, demodulated audio can be input to commercial decoding software for identification purposes as outlined in ITU-R recommendation SM.1600, "Technical Identification of Digital Signals."

Dramatically Compress Playback Review

The N6829BS software has a squelch function that skips over portions of the recorded data that does not contain voice. By removing the noise and "dead time" in a recording, reviewers can quickly listen to two-sided voice transmissions, thereby dramatically compressing the playback time. Reviewers might only need to hear a few seconds of this compressed two-sided voice transmission to determine if the recording should be saved or deleted.

Full-featured Playback

The N6829BS software shows the signal file playback in the time domain, a tuner function showing the full bandwidth of the file, and a processing function for enhancing the conversion to voice. Besides the typical playback functions, the N6829BS software lets the user select regions of time and repeat or loop on those regions. You can tune the frequency of SSB signals with the mouse in real-time while listening. The bandwidth of the processing function is user-selectable.

The N6829BS processing functions can display either the modulated or demodulated signal, in the frequency or time domain. Modulation of AM, FM, USB, LSB, and CW detections is automatically chosen but it is also user-selectable. You can choose a low-pass filter function to remove CTCSS tones or choose the voice enhance filter to remove noise.

To simplify sharing the file with others who do not have N6829BS software, the selected portion of the returned signal can be saved as a .wav or .16t file, with all demodulation and filtering already applied.

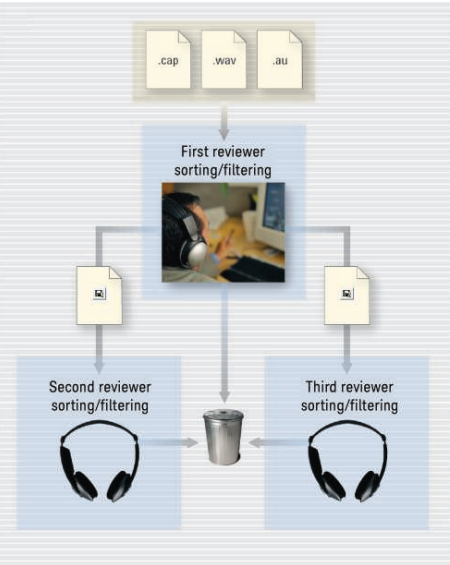

Multiple reviewers using the N6829BS file player can be organized in a hierarchy for maximum efficiency.

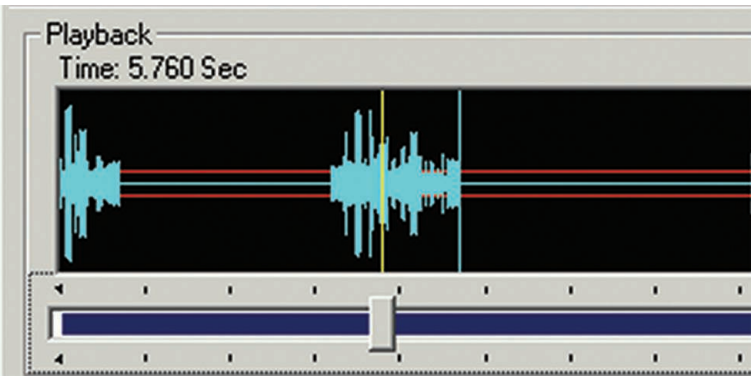

Squelch function skips over the noise in playback to significantly compress listening time and reduce fatigue.

Efficient File Management

Signal files are automatically displayed in the N6829BS file manager and can easily be selected and played. With the up/down arrow buttons, users quickly move through a list of files while they play automatically, the N6829BS can instantly jump to next recording for faster playback of multiple files.

Reviewers will listen to the voice content and delete unwanted recordings or save files to one of two directories. Directory1 could be used for highly relevant signals and directory2 used for less relevant signal files or data intercepts. The file list can be refreshed manually or automatically. New files created from an operational N6820ES Surveyor 4D system can be saved in the same directory. To save critical review time, all retuning, looping, filtering, and noise reduction settings are saved in the file.

Users can establish a socket link between the N6820ES Surveyor 4D system and the N6829BS software that will automatically add frequencies to the N6820ES Surveyor 4D ignore list. Now deleting a file with the alternate delete button in file manager adds that file's center frequency to the N6820ES Surveyor 4D ignore list.

The N6829BS software allows reviewers to listen to files, demodulate the signal files with radio functions, and manage work flow efficiently.

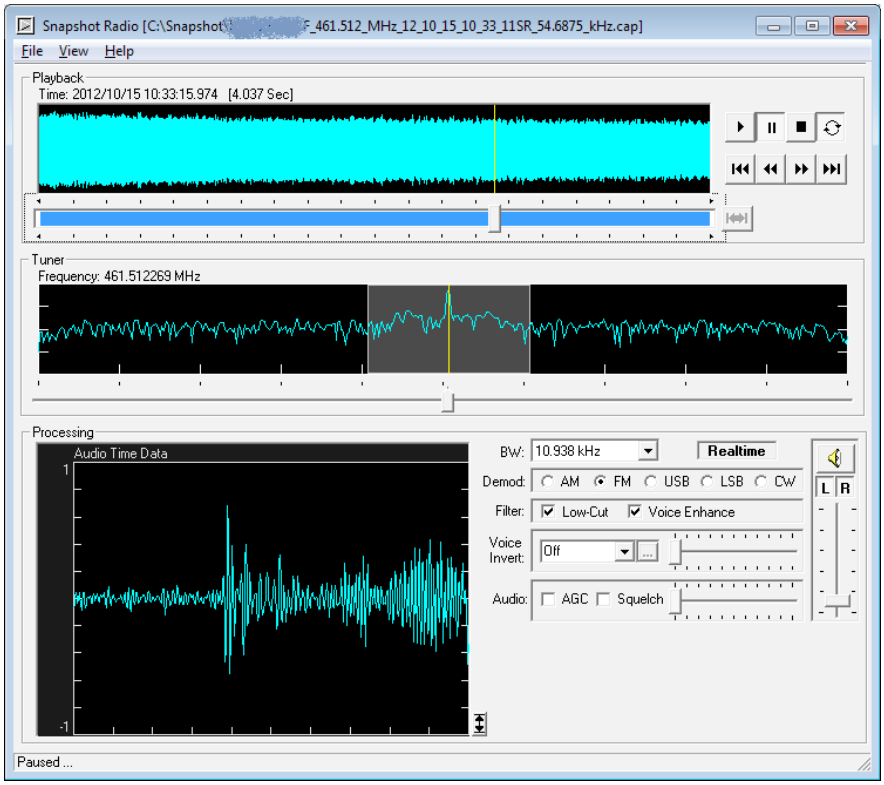

Integrated, full-featured playback in N6829BS software.

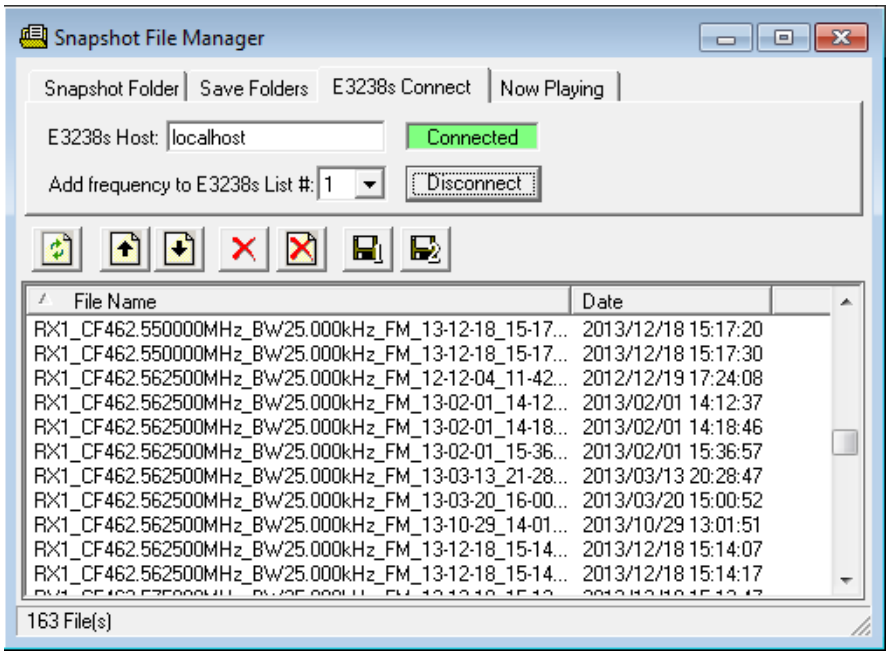

Efficient recorded file management automatically jumps to next recording after save/delete decision.

Operating Characteristics
Supports playback of capture files up to 2 MHz in bandwidth.
Input file formats supported
.cap from N6820ES Surveyor 4D or 89600S .sdf from 89600S .au .wav from other types of programs
Ouptut file formats:
.wav, .16t, or .cap

The N6829BS software can be installed on a PC with these recommended features:

Processor	: 1.8 GHz P4 or better
Memory	: 512 MB
Operating System	: Win-2K with SP4 or Win-XP with SP2
Sound Card	: Required
LAN	: Ethernet adaptor required

Ordering Information	
N6829BS	Audio player
N6829BS-103	Standard software on Windows
Choose one of three license key options:	
N6829BS-LKI	Independent USB-keyed Software License
N6829BS-LKS	Shared USB-keyed Software License
N6829BS-LKC	Computer-keyed Software License

The N6829BS software can be tied to a USB key or the hostID of the PC. Your license file can be encoded specifically for a removable USB hostID device (USB Key) by selecting LKI or LKS options. This is the best choice if you prefer to work on multiple computers, or want to easily move the software to another PC. Option LKS lets you share the USB key device with the 35688E or N6820E software licensing schemes.

Alternatively, your license file can be keyed to a specific computer as option LKC. A unique hostID is derived from your computer's components. This is the best choice if you need operational simplicity; the N6829BS software will work on a specific PC.

myKeysight

www.keysight.com/find/mykeysight
A personalized view into the information most relevant to you.

Three-Year Warranty
www.keysight.com/find/ThreeYearWarranty
Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.

Keysight Assurance Plans
www.keysight.com/find/AssurancePlans
Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.

www.keysight.com/quality
Keysight Technologies, Inc. DEKRA Certified ISO 9001:2008 Quality Management System

Keysight Channel Partners
www.keysight.com/find/channelpartners
Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:
www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-07-10-14)

This information is subject to change without notice.
© Keysight Technologies 2014
Published in USA, August 1, 2014
5989-2839EN
www.keysight.com