
# Keysight Technologies

Performing Bit Error Rate Measurements with ADS and Baseband Studio Streaming

**Connected Solutions** 

Application Note



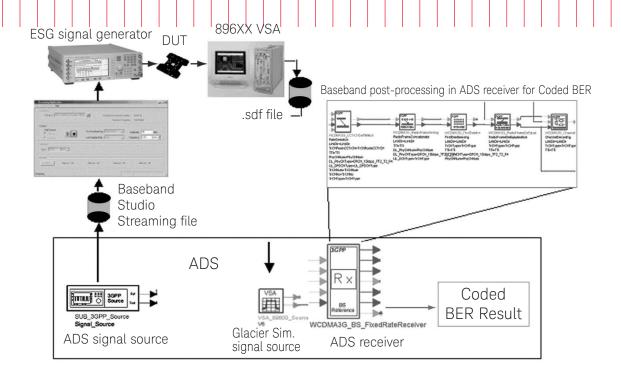

# 

# Introduction

Verifying Bit Error Rate (BER) and Block Error Rate (BLER) performance can present real challenges to RF engineers. Two major factors should be considered: (1) the number of bits required to produce a statistically meaningful BER/BLER result, and (2) the baseband functionality required to verify coded BER/BLER.

Arbitrary waveform generator (Arb) based solutions allow waveforms to be downloaded from simulation to the signal generator Arb for BER/BLER testing, but are limited by the Arb depth of the signal generator. Depending on the application, this may or may not be sufficient.

Another challenge is that RF engineers designing RF receivers may not have access to the baseband functionality required to perform coded BER measurements, which can present a barrier to verifying coded BER – a key receiver design specification with today's digital communications signal formats.

The Connected Solutions application described in this note can help in verifying RF BER performance when a large number of data bits are required to achieve a statistically meaningful BER result.

## Concept

A conceptual flow diagram is shown on page 1. The ADS simulation signal can be stored to a Baseband Studio Streaming data file using a new file writing capability available in ADS 2003C. The amount of data to be streamed out of the ESG is determined by the hard disk storage size to store the Baseband Studio Streaming file.

After the ADS simulation has been run and the binary Baseband Studio Streaming file is created, the signal is streamed to the ESG using Baseband Studio Streaming to turn the simulated signal into a real RF test signal.

The RF test signal is input into the device under test (DUT), which could be an RF component or a receiver RF front-end. The DUT output is captured using a Vector Signal Analyzer (896XX VSA) to record an sdf file (.sdf). After the sdf recording is read into ADS, the signal can be post-processed with a simulation baseband receiver (for example, WLAN or WCDMA) to compute the coded BER or Packet Error Rate (PER).

## Test Setup Overview

This application uses the new Baseband Studio file writer in ADS 2003C and the Connection Manager. An E4438C Electronic Signal Generator (ESG) with the Baseband Studio Streaming card, option 602, is required for streaming large amounts of data from the ADS-created file to the ESG output.

An 896XX VSA with option 288 is used to capture the IQ waveform to read back into ADS. The ADS wireless design libraries, such as the WCDMA or WLAN design library, can be

used to post-process the data to compute BER or PER. The 89601 VSA software with option 105 is useful for reading the recorded signal back into simulation and for performing RF measurements such as error vector magnitude (EVM) in ADS.

## Verifying Coded BER/PER Performance

One of the key challenges of verifying coded BER/PER performance of RF hardware is that the baseband functionality required for coded BER/PER may not be available for testing. For example, performing a coded BER measurement for 3GPP W-CDMA requires that the baseband functionality to perform such tasks as de-scrambling, de-spreading, de-interleaving, de-multiplexing, and so on, are required to recover the data bits from the measured signal so that a BER measurement can be performed. This can present a potential barrier if the RF hardware being tested does not include that baseband functionality.

This Connected Solutions application uses the Wireless Design Libraries in ADS to perform the post-processing on the measured signal so that coded BER/PER can be measured.

An example of a coded WCDMA BER measurement with fading is performed with ADS and Baseband Studio Streaming, with 1000 frames (or 10 seconds) of data streamed out of the ESG from a file created by ADS with the simulated fading. The ESG output is captured with an 89641 VSA and read back into ADS for the BER measurement. The results are shown in Figure 1.

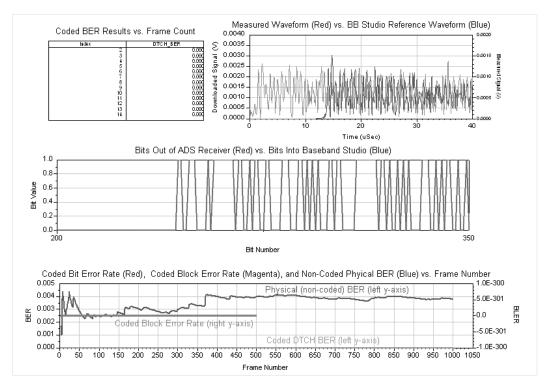


Figure 1. BER/BLER results for data streamed out of the ESG, captured with a VSA, and read back into ADS to obtain the measurements.

## Summary

Connected Solutions can help with performing coded BER/PER measurements when a large number of data bits are required for the BER/PER measurement. This application is useful for RF component testing or for RF subsystem testing, such as testing a receiver front-end. ADS Design Libraries provide the necessary baseband post-processing to perform coded BER and PER measurements.

## Required Equipment/Software

E8900A/AN ADS 2003C
E5720A/AN Connection Manger
E8850A/AN Communications System Designer
E8875A/AN 3GPP W-CDMA Design Library (optional)
E8874A/AN WLAN Design Library (optional)
E4438C ESG with option 602
896XXA VSA Software with option 288, 100, AYA, 105, B7N for 3GPP W-CDMA, B7R for WLAN

#### Resources

Connected Solutions Web Page: For more information about Keysight Technologies' connected solutions, including additional application notes and a configuration guide, visit: www.keysight.com/find/eesof-connectedsolutions

Keysight EEsof EDA Home Page: For more information about Keysight EEsof EDA, visit: www.keysight.com/find/eesof

Keysight Baseband Studio: For more information about Keysight Baseband Studio, visit: www.keysight.com/find/basebandstudio

This document was formerly known as application note number 1476-5.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

#### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

#### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

#### Europe & Middle East

Lui ope a midule Last	
Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
	0800 805353 Opt. 1 (DE) Opt. 2 (FR)

For other unlisted countries: www.keysight.com/find/contactus (BP-07-10-14)

0800 0260637

United Kingdom

