
Keysight Technologies Using an InfiniiVision Series MSO To Debug an Automotive CAN Bus



Application Note

Table of Contents

Introduction	2
What is an MSO?	3
Verifying proper operation	
of an automatic	
windshield-wiper system	4
Hardware-accelerated	
CAN decode reveals an	
infrequent problem	5
Triggering the MSO on	
error frames reveals a	
signal-integrity problem	6
Triggering the MSO on the	
random glitch reveals the	
source of the problem	8
Summary	9
Glossary	10
Related Literature	11

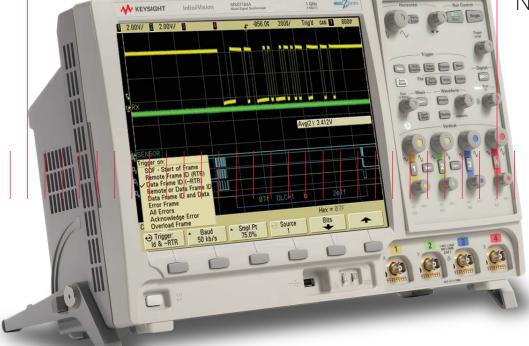


Introduction

To improve efficiency of system communication and to reduce cost, all of today's automotive designs employ a variety of serial bus communication protocols. The I²C and SPI protocols are most often used for chip-to-chip communication within electronic control units (ECUs). For long-haul serial communication between various automotive subsystems such as anti-lock brakes, airbag deployment, engine control, and GPS navigation, the CAN, LIN, MOST and FlexRay protocols are the most popular serial buses implemented in today's vehicles, as shown in Figure 1. Unfortunately, long-haul communication is often susceptible to signal integrity problems caused by the naturally harsh environment found in automobiles, including signal interference from ignition systems and

random system noise, which can sometimes create errors during critical communication cycles. By definition, automotive electronic systems are embedded mixed-signal systems because they feature multiple analog sensors and analog motor controls under digital control. For years, traditional oscilloscopes have been the primary tool-of-choice among automotive electronic system design engineers to measure the quality of both analog and digital signals. But traditional analog and digital oscilloscopes have many limitations, including lack of complex serial triggering and limited input channels of acquisition. However, a new class of measurement tools called mixed signal oscilloscopes (MSOs) offers many advantages for debugging and verifying proper operation of today's automotive designs.

To illustrate the unique advantages of Keysight Technologies, Inc. InfiniiVision series MSOs, this application note shows a typical debugging methodology designed to uncover signal integrity problems in a CANbased automotive system. While synchronizing on and capturing a CAN differential signal that digitally transmits analog sensor data to an ECU, the MSO was also used to repetitively capture and measure the output amplitude of a remote analog input sensor. At the same time, the MSO also was used to capture multiple SPI control signals within the ECU. But before we explore this particular automotive CAN design and explaining how the MSO was used to debug and discover a signal integrity problem, let's first define what we mean by "MSO."

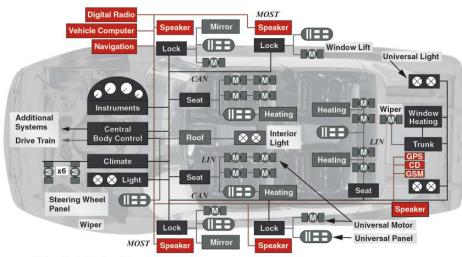

CAN Controller Area Network
GPS Global Positioning System
GSM Global System for Mobile Communications
LIN Local Interconnect Network
MOST Media-Oriented System Transport



Figure 1: Typical distributed automotive electronic system under serial bus control

What is an MSO?

An MSO is a hybrid test instrument that combines all of the measurement capabilities of a digital storage oscilloscope (DSO) with some of the measurement capabilities of a logic analyzer, along with some serial protocol analysis - into a single, synergistic instrument. With an MSO, you are able to see multiple time-aligned analog, parallel-digital, and serially decoded waveforms on the same display, as shown in Figure 2. Although many of today's traditional oscilloscopes have limited triggering capabilities, some of today's MSOs include sophisticated serial triggering and protocol decode analysis that are optimized for automotive electronic system debug.

MSOs typically lack the large number of digital acquisition channels of full-fledged logic analyzers and also lack the higher abstraction levels of analysis provided by serial protocol analyzers. But the relative simplicity of MSOs allows you to use them with ease and avoid the complexities involved in operating logic analyzers and protocol analyzers. In fact, one of the primary advantages of an MSO is its use model. You use an MSO in much the same way you use an oscilloscope. And because MSOs are highly integrated, they are much easier to use than loosely tethered two-box mixed-signal measurement solutions consisting of either a scope linked to a logic analyzer or a scope linked to a serial bus protocol analyzer. A good MSO, such as Keysight's MSO7000B, is user-friendly, provides fast waveform update rates, includes serial triggering and analysis, and operates much like an oscilloscope - not like a logic analyzer or protocol analyzer.

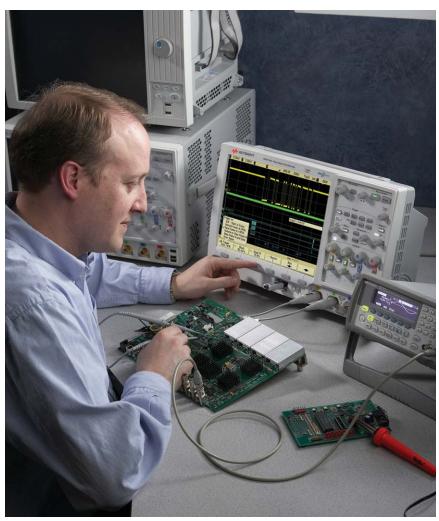


Figure 2: Keysight's 7000 Series mixed signal oscilloscope (MSO)

Verifying proper operation of an automatic windshield-wiper system

Before integrating a new embedded design into an automobile, a Keysight MSO was first used in the lab environment to verify proper circuit and protocol operation of a prototype automatic windshield-wiper system. Figure 3 shows multiple timecorrelated analog and digital signals from the prototype system captured and displayed on an MSO7104A. The channel-1 waveform (top/yellow trace) is the differential CAN bus signal that communicates to various remote subsystems including the windshieldwiper system. The channel-2 waveform (middle/green trace) shows the analog output signal level of a remote rain sensor that optically detects the amount of rain/snow striking the windshield. Also shown are various time-correlated SPI control signals (blue traces shown near the bottom of the scope's display) within the ECU including CLOCK, DATA, CS, and an INTERRUPT signal — all captured using some of the MSO's available sixteen logic-timing channels. The multi-colored bus trace at the bottom of this oscilloscope's display shows time-correlated decoded information of CAN packets captured on a userselected CAN acquisition channel, which in this case was channel-1.

In this particular design, the instantaneous output amplitude of the remote analog sensor is converted to a digital value using an analog-to-digital converter (ADC), and then it

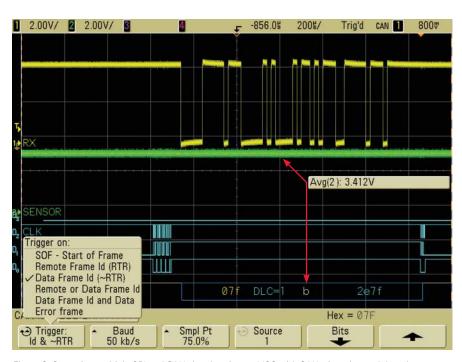


Figure 3: Capturing multiple SPI and CAN signals using an MSO with CAN triggering and decode

is serially transmitted to the ECU as a single data byte within a particular data frame (07FHEX). To capture repetitive transmissions of this sensor's output and verify proper operation of the prototype, the MSO was initially set up to trigger on the CAN data frame 07FHEX, as shown in Figure 3. The analog sensor's output value is always transmitted in this frame. With this oscilloscope setup condition, the automotive design engineer was able to easily measure the analog amplitude of the sensor's output (3.41 V) while monitoring and verifying the data value (BHEX) that was actually transmitted within the CAN packet. While testing this prototype automatic wiper system in the lab, no problems were observed, and the CAN differential signal appeared to be nearly noise-free.

Unfortunately, when this automotive subsystem was integrated into the automobile, the automatic wiper system performed unreliably, and it was determined that the data value received by the ECU did not always match the real-world physical condition of the analog moisture sensor. When circuit problems are predictable and repetitive, it can be a fairly easy task to isolate and track down the root cause of a circuit problem. But in this particular automotive design, once the design was integrated into the automobile, errant transmissions of data from the sensor were random and infrequent - making it difficult to isolate the cause of the problem.

Hardware-accelerated CAN decode reveals an infrequent problem

Figure 4 shows the same signals that were originally measured in the lab, but this time the signals were captured with the automatic wiper system integrated into the automobile. We now see the influence of noise and interference on the differential CAN signal caused by the harsh environment in the vehicle. The automotive design engineer monitored the scope's display while repetitively triggering on data frame ID: 07FHEX. The engineer observed an occasional red "flash" within the CAN decode string (bottom trace), as shown in Figure 4. This MSO's CAN decode feature colorcoded bad CRCs in red, and other frame error conditions are shown as a red bus trace. This scope's very fast waveform update rate (up to 100,000 real-time waveforms per second) and hardware-accelerated serial decode were critical to capturing the infrequent bad data transmissions. The hardware-accelerated serial decode displays decoded strings as fast as 60 updates per second – faster than the human eye can read, but slow enough to see color-coded error conditions if they occur infrequently.

Most oscilloscopes with deep memory and serial decode capabilities update very slowly. This is primarily because deep memory records are decoded using software post-processing techniques. Waveform and decode updates can sometimes take seconds. This means that if errors occur infrequently, most error conditions will randomly occur during the scope's dead-time — not during the scope's acquisition time. This makes it nearly impossible

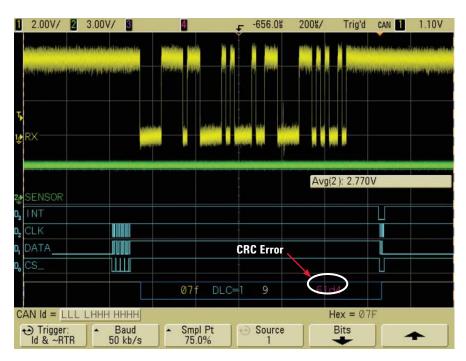


Figure 4: Random errors observed in CAN decode while triggering on data frame ID: 07F_{HFX}

to randomly capture an errant transmission with a traditional oscilloscope, even with CAN triggering and decode capabilities. But hardware-accelerated CAN decoding in the Keysight InfiniiVision series MSO statistically enhanced the probability of catching random and infrequent error conditions, since both the waveform and CAN decode update rates exceeded the repetitive rate of occurrences of data frame 07F_{HFX}.

To freeze the scope's display on just one occurrence of a "bad" data transmission, the design engineer first attempted to quickly press the scope's front-panel STOP key when a "red" decode string was observed. Unfortunately, the scope's waveform and decode update rate was so fast that by the time the STOP key was pressed, several subsequent acquisitions had occurred and the display always stopped on a "good" data transmission.

Triggering the MSO on error frames reveals a signal-integrity problem

The next step was to setup the scope's triggering to synchronize only on error frames, as shown in Figure 5. With this trigger setup condition (trigger on error frame), the scope only captured and displayed "bad" CAN transmissions and ignored "good" transmissions. Now the engineer could either press the STOP key at any time to analyze the signal quality of the last "bad" transmitted CAN frame, or use the scope's single-shot acquisition mode to freeze the scope's display on the next "bad" data transmission. From this display (Figure 5), the engineer's first suspicion was that perhaps the random data transmission problems were due to excessive random noise that was coupling into the differential CAN signal (top/ yellow trace). We can see that the noise riding on the CAN signal appears to have a Gaussian distribution as evidenced by the 256 levels of display intensity provided by this scope's MegaZoom III technology display system similar to the display quality of a traditional analog oscilloscope. But after measuring the random noise level with the MSO's "standarddeviation" measurement, the engineer determined that the signal noise level was within specified tolerances and not inducing errors.

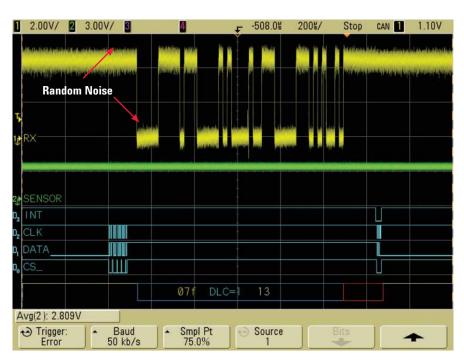


Figure 5: Triggering on CAN error frames isolates acquisitions on bad frame transmissions

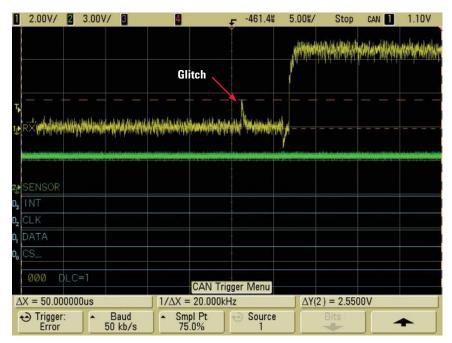


Figure 6: Zooming in on differential CAN waveform reveals a glitch

After further inspection of the differential CAN signal on channel-1, the engineer discovered that a narrow glitch had occurred during this frame's data transmission just prior to the 5th rising edge of the differential CAN signal. When viewing this stored CAN frame in the normal "compressed" mode of a deep-memory acquisition (up to 8 M points) spread across the scope's display with the main timebase at 200 µs/ div, this narrow glitch was barely visible and could be easily missed, as shown in Figure 5. But when the engineer expanded the timebase on the stored trace to 5 μ s/div (Figure 6), the glitch was easily viewed with this scope's high sample rate resolution (up to 4 GSa/s).

After discovering this glitch and measuring its amplitude with the MSO's cursors, the engineer pressed the scope's front-panel RUN key again to begin repetitive acquisitions while triggering only on error frames. While observing the scope's repetitive waveform updates, the engineer could then see that narrow glitches were occurring not only infrequently, but also at random locations within the data frame and with no particular phase relationship to the differential CAN signal. It appeared that these glitches were being caused by signal coupling from a non-phase-related source. If the source of these glitches could be tracked down, then the root cause could more easily be determined and fixed.

Triggering the MSO on the random glitch reveals the source of the problem

To synchronize the scope's display on the non-phase-related glitch rather than error frames, the automotive design engineer next set up the scope to uniquely trigger on the glitch. This was accomplished by using the scope's pulse-width triggering capability which can be defined to trigger on either positive or negative pulses based on a user-specified range of time (pulse-width). In this case, the engineer configured the scope to only trigger acquisitions on positive pulses of the channel-1 input (differential CAN signal) if the width of the pulse was < 500 ns. With this setup condition, the scope synchronized its display on the randomly occurring glitch, always capturing and showing the glitch near the scope's default center-screen trigger location. Now the CAN data frames appeared uncorrelated in terms of phase relationship relative to the glitch trigger source.

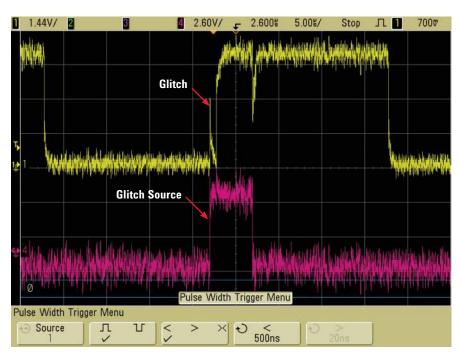


Figure 7: Pulse-width triggering reveals source of random and infrequent glitch

To track down the source of this glitch, the engineer then connected another probe to an unused channel (channel-4) of this 4+16-channel MSO and began probing "suspect" signals in the automobile to see which signal might be synchronized/phase-related to the glitch. After a few minutes, the engineer found the source of the glitch, as shown in Figure 7. The channel-4 waveform (bottom pink trace) shows a digital pulse that controlled a relay

that induced a high-voltage surge within the vehicle's voltage regulator. If the voltage regulator cycled during the transmission time of data frame ID: 07F_{HEX}, an error would occasionally occur in the windshield-wiper system. Once the engineer tracked down the source of the problem, it was fairly easy to isolate the windshield-wiper CAN node from the high-voltage surge signal with better shielding, which also significantly improved this CAN system's noise-immunity.

Summary

This paper showed how a Keysight InfiniiVision series mixed signal oscilloscope (MSO) can be used to more effectively and efficiently turn-on and debug an embedded mixed-signal design in an automobile that utilizes serial bus CAN data transmission. Critical characteristics of the MSO that enabled the automotive design engineer to quickly discover the cause of the intermittent problem included multiple channels of time-correlated analog and logic acquisition, fast waveform update rates, hardware-accelerated CAN bus

decode, and various triggering capabilities including frame ID, error frame, and glitch/pulse-width triggering. Although this application note focused on an automatic windshield-wiper application, the debugging techniques described in this paper can also be directly applied to other automotive applications. The next time you need to turn-on and debug your embedded automotive mixed-signal design, you might consider using a Keysight InfiniiVision series MSO in place of your current DSO, protocol analyzer, and/or logic analyzer measurement solution.

Glossary

ADC Analog-to-Digital Converter, sometimes referred to as an A-to-D

CAN Controller Area Network is a differential 2-wire interface with data rates ranging from 10kbps to 1Mbps.

Multiple applications include window & seat controls, engine management, and anti-skid systems.

DSO Digital Storage Oscilloscope that acquires and displays analog characteristics of input signals using

either real-time or equivalent-time sampling techniques

ECU Electronic Control Unit is an embedded computer system found in automobiles

I²C Inter-integrated Circuit bus is a common 2-wire serial bus that utilizes a self-arbitration protocol and is

often used for chip-to-chip communication

LIN Local Interconnect Network is a class A protocol operating up to 19.2kbps over a cable length up to 40

meters. Typical applications include window controls and other non-time/safety-sensitive functions such

as comfort controls.

MOST Media Oriented Systems Transport bus provides an optical solution for automotive media (entertainment)

networks such as video, CD, etc.

MegaZoom III An Keysight proprietary acquisition and display technology that provides a digital storage oscilloscope

with technology extremely fast waveform update rates (> 100,000 real-time waveforms per second) and

a high-resolution display quality that meets or exceeds the display quality of traditional analog

oscilloscopes

MSO Mixed Signal Oscilloscope that synergistically combines all of the measurement capabilities of an

oscilloscope with some of the measurement capabilities of a logic analyzer and includes a

time-correlated display of both analog and digital waveforms

SPI The Serial Peripheral Interface bus is a 4-wire serial communications interface used by many

microprocessor peripheral chips. The SPI circuit is a synchronous serial data link that provides support for a low/medium bandwidth (1 megabaud) network connection amongst CPUs and other devices


supporting the SPI.

Related Keysight literature

Publication title	Publication type	Publication number
Keysight 7000B Series InfiniiVision Oscilloscopes	Data sheet	5990-4769EN
Keysight 6000 Series InfiniiVision Oscilloscopes	Data sheet	5989-2000EN
Keysight 5000 Series InfiniiVision Oscilloscopes	Data sheet	5989-6110EN
Keysight InfiniiVision Series Oscilloscope Probes and Accessories	Data sheet	5968-8153EN
CAN/LIN Measurements (Option AMS) for Keysight InfiniiVision Series Oscilloscopes	Data sheet	5989-6220EN
Evaluating Oscilloscopes for best Waveform Update Rate	Application note	5989-7885EN
Evaluating Oscilloscopes to Debug Mixed-Signal Applications	Application note	5989-3702EN
Evaluating Oscilloscope Bandwidths for your Applications	Application note	5989-5733EN
Evaluating Oscilloscope Sample Rates vs. Sampling Fidelity	Application note	5989-5732EN
Evaluating Oscilloscope Vertical Noise Characteristics	Application note	5989-3020EN

To download these documents, insert the publication number in the URL: $\label{locality} $$http://cp.literature.keysight.com/litweb/pdf/xxxx-xxxxEN.pdf$

For the most up-to-date and complete application and product information, please visit our product Web site at: www.keysight.com/find/scopes

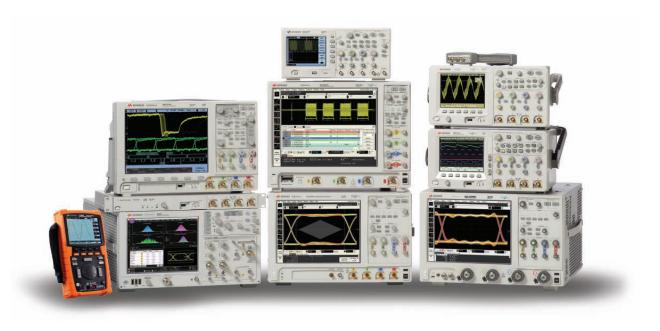

Keysight Technologies Oscilloscopes

Multiple form factors from 20 MHz to >90 GHz | Industry leading specs | Powerful applications

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.axiestandard.org



AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.

www.lxistandard.org



LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.

www.pxisa.org



PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Three-Year Warranty



www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.

Keysight Assurance Plans



www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.

www.keysight.com/quality



Keysight Technologies, Inc. DEKRA Certified ISO 9001:2008 Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

This document was formerly known as application note 1576.

www.keysight.com/find/scopes

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Laropo a imadio Laoi	
Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)

For other unlisted countries: www.keysight.com/find/contactus (BP-07-01-14)

0800 0260637

United Kingdom

