


Keysight N9038A MXE EMI Receiver

Configuration Guide

The MXE configuration guide will help you determine which performance options, measurement applications, accessories, and services to include with your new MXE or to add as upgrades to an existing MXE.

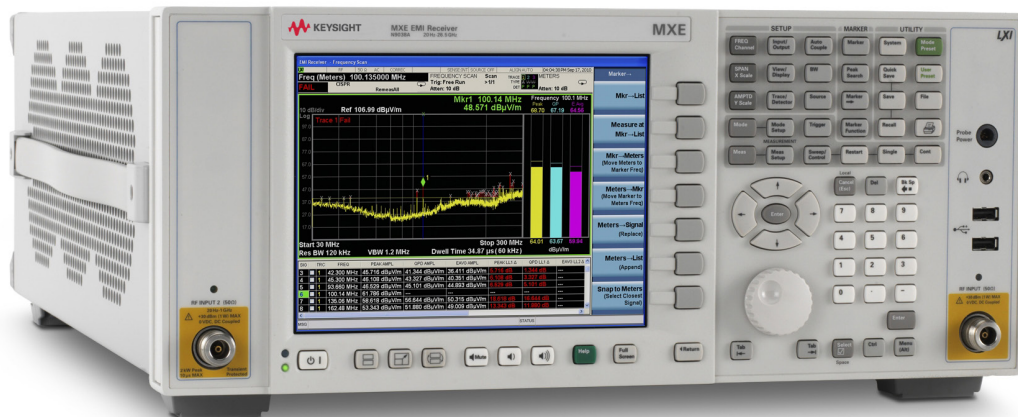

Configure Your Keysight MXE EMI Receiver

This step-by-step process will help you configure your new MXE EMI receiver. Tailor the performance to meet your requirements. For detailed specifications, refer to the MXE specification guide (N9038-90010). For a summary of specifications, refer to the MXE EMI receiver data sheet (5990-7421EN).

Included in base product

Standard options and accessories come with the MXE base model at no additional charge and do not need to be ordered. They include:

- Full-band, built-in preamplifier for frequency range selected
- High-performance digital signal processing with 2 GB capture memory
- Precision frequency reference (aging rate $\pm x 10^{-7}$ /year)
- Mechanical attenuator (2 dB steps, 0 to 70 dB)
- Full spectrum analysis capability
- 10 MHz analysis bandwidth
- Front panel control for two automatic external line impedance stabilization networks (LISN)
- Enhanced display package with spectrogram, trace zoom, and zone span
- Second IF output on rear-panel Aux IF connector
- Receiver identification response settings to respond as R&S ESU, ESR, and ESL receivers in MXE receiver mode
- USB mouse and keyboard
- User and Getting Started Guides (U.S. English) embedded and on CD
- 3 year return-to-Keysight warranty

Step 1. Select maximum frequency range (required option)		
Description	Option number	Additional information
Frequency range, 3 Hz to 3.6 GHz	N9038A-503	Includes preamplifier, 100 kHz to 3.6 GHz (N9038A-P03)
Frequency range, 3 Hz to 8.4 GHz	N9038A-508	Includes preamplifier, 100 kHz to 8.4 GHz (N9038A-P08)
Frequency range, 3 Hz to 26.5 GHz	N9038A-526	Includes preamplifier, 100 kHz to 26.5 GHz (N9038A-P26)
Frequency range, 3 Hz to 44 GHz	N9038A-544	Includes preamplifier, 100 kHz to 44 GHz (N9038A-P44)

Step 2. Choose analysis bandwidth		
Description	Option number	Additional information
10 MHz analysis bandwidth	Standard	
25 MHz analysis bandwidth	N9038A-B25	Optional

Step 3. Choose optional features		
Description	Option number	Additional information
Type-N RF connector, female	N9038A-CNF	Type-N RF connector, female
3.5 mm connector, male	N9038A-C35	Choose 3.5 mm connector for input 1 on Option 526 only (input 2 remains type-N)
External source control	N9038A-ESC	Control Keysight sources from the front panel of the MXE
Time domain scan	N9038A-TDS	Provides high-overlap FFT scanning for fast signal capture
External mixing	N9038A-EXM	Connects with Keysight and third party mixers to extend frequency coverage to 1.1 THz; single port ¹ for LO out and IF in (SMA female)

Step 4. Add data storage		
Description	Option number	Additional information
Additional removable solid-state drive	N9038A-SSD	Provides a fully-imaged removable solid-state drive in addition to the one installed in the instrument

Step 5. Add rear panel output utility		
Description	Option number	Additional information
Y-axis screen video output	N9038A-YAS	Screen video (0-1 volt open circuit) on rear panel analog out

Step 6. Add real-time spectrum analysis		
Description	Option number	Additional information
Real-time analysis up to 85 MHz BW, basic detection	N9038A-RT1	Includes frequency mask trigger (FMT) and time qualified trigger (TQT); minimum 3.7 μ s signal duration for 100% probability of intercept (POI); requires Option B85.
Analysis bandwidth, up to 85 MHz	N9038A-B85	Provides real-time analysis bandwidth of up to 85 MHz below 3.6 GHz and 40 MHz above 3.6 GHz.

1. When used with the Keysight 11970 Series external mixers, an external diplexer is required. Recommended diplexer can be purchased from Keysight as N9029AE13 or from OML as DPL313B.

Step 7. Choose measurement application software and license type

Note: The last two letters of the ordering numbers indicate the license type—FP stands for fixed perpetual, TP for transportable perpetual; it is recommended that you configure each application with the same license type; for more information about transportable licenses visit www.keysight.com/find/X-Series_transportable

Description	Fixed license	Transportable license	Additional information
General purpose			
Analog demodulation	N9063A-2FP	N9063A-2TP	Adds one-button measurement for AM/FM/PM demodulation with metrics, tune and listen, audio analysis and AF spectrum. Supports analog output.
	N9063A-3FP	N9063A-3TP	Adds FM Stereo and RDS; requires 2FP/2TP
Noise figure	N9069A-1FP (requires preamplifier to meet specifications)	N9069A-1TP (requires preamplifier to meet specifications)	Adds one-button measurements for noise figure, gain, and related metrics; requires preamplifier to meet specifications; works with Keysight Technologies, Inc. N400xA Series smart noise sources and 346 Series noise sources
Phase noise	N9068A-2FP	N9068A-2TP	Adds one-button measurements for analyzing phase noise in frequency domain (log plot) and time domain (spot frequency)
89600 VSA software	89601B	Not available	Industry-leading measurement software for evaluating and troubleshooting signals in R&D; PC-based software supporting more than 30 measurement platforms, plus more than 75 signal standards and modulation types including MIMO analysis; www.keysight.com/find/89600_VSA

Step 8. Choose accessories and documentation

Description	Option number	Additional information
Rack mount	N9038A-1CM	Adds rack mount flanges to the MXE
Front handles	N9038A-1CN	Adds front handles to the MXE
Rack mount with handles	N9038A-1CP	Adds rack mount and handles to MXE
USB DVD-ROM/CD-R/RW	N9038A-DVR	Enhances the usability of the Windows 7 professional operating system
US 65-key USB keyboard	N9038A-KB2	Compact design for easy storage

Step 9. Choose warranty length

Description	Option number	Additional information
Return-to-Keysight warranty, 3 years	Standard	Standard 3-year warranty is included at no additional charge
Return-to-Keysight warranty, 5 years	R-51B-001-5Z	

Step 10. Add calibration, technical training, support, and upgrade services

Description	Option number	Additional information
ANSI Z540-1-1994 calibration	N9038A-A6J	
Commercial calibration certificate with test data	N9038A-UK6	Calibration certificate only available at time of purchase; only provides measurement results
Accredited calibration plus uncertainties plus guardbanding, at time of purchase	N9038A-AMG	ISO 17025 accredited calibration at time of purchase
Service: 1-day start-up assistance	PS-S20-01	Training on how to operate your instrument effectively (recommended)
Keysight calibration, 3 years	R-50C-011-3	
Keysight calibration, 5 years	R-50C-011-5	
Keysight calibration + uncertainties + guardbanding, 3 years	R-50C-016-3	ISO 17025 accredited calibration
Keysight calibration + uncertainties + guardbanding, 5 years	R-50C-016-5	ISO 17025 accredited calibration
ANSI Z540-1-1994 calibration - 3 years	R-50C-021-3	
ANSI Z540-1-1994 calibration - 5 years	R-50C-021-5	

Instrument Upgrades

Upgrade your existing MXE

Fast license-key upgrades for performance options that do not require additional hardware:

1. Place an order for the upgrade with Keysight and request to receive the software entitlement certificate through email
2. Redeem the certificate through the Web by following the instructions on the certificate
3. Install the license file and latest software in the MXE
4. Begin using the new capability^{1,2}

Installation and testing information is available at:
www.keysight.com/find/mxe_upgrades

You can upgrade!

Options can be added after your initial purchase.



All of our X-Series application options are license-key upgradeable.

Description	Upgrade number	Additional information
Windows Embedded Standard 7	N9094AK-W7X N9094AK-PC6	Upgrade existing 32-bit processor with Windows XP to a 64-bit performance processor with Windows 7, 16 GB RAM and removable solid-state drive; must be ordered under N9038AK
Increase frequency from 3.6 to 8.4 GHz	N9038AK-F01	Requires Option 503
Increase frequency from 3.6 to 26.5 GHz	N9038AK-F03	Requires Option 503
Increase frequency from 3.6 to 44 GHz	N9038AK-F04	Requires Option 503
Increase frequency from 8.4 to 26.5 GHz	N9038AK-F07	Requires Option 508
Increase frequency from 8.4 to 44 GHz	N9038AK-F08	Requires Option 508; for Serial prefix less than MY/SG5322, upgrade kits include N9038AK-HL4
Increase frequency from 26.5 to 44 GHz	N9038AK-F13	Requires Option 526; for Serial prefix less than MY/SG5322, upgrade kits include N9038AK-HL4
Increase analysis bandwidth from 10 MHz to 25 MHz ¹	N9038AK-B25	
Additional removable solid-state drive	N9094AK-WX7 N9094AK-SSD	For Windows 7 operating systems only, provides additional removable solid-state drive; not compatible with Win XP systems; requires PC4 or greater; additional Windows XP drive last order date was March 1, 2015; must be ordered under N9038AK
Add Y-axis screen video output	N9038AK-YAS	
USB DVD-ROM/CD-R/RW drive	N9038AK-DVR	
Keyboard, USB interface	N9038AK-KYB	
US 65 key USB keyboard	N9038AK-KB2	
Rack mount and handle kit	N9038AK-1CP	Not compatible with Options 1CM and 1CN
Front handle kit	N9038AK-1CN	Not compatible with Options 1CM and 1CP
Rack mount kit	N9038AK-1CM	Not compatible with Options 1CP and 1CN
External source control kit	N9038AK-ESC	
Type "N" connector for input	N9038AK-CNF	Makes both inputs 1 and 2 type-N connectors
3.5 mm connector for input	N9038AK-C35	Input 2 remains type-N
Hardware to enable monitor spectrum, APD, and time domain scan	N9038AK-HL4	Includes high-performance digital signal processor (Option DP2) and wideband second IF rear panel output (Option CR3)

1. At the time of manufacture, the hardware related to many of these options was fully adjusted and the option performance was verified to be within its warranted specifications. Within one year of the initial calibration date of the analyzer, this option is fully calibrated with no further adjustment or verification testing.
2. If this analyzer has been adjusted as part of a repair or calibration during its first year, or if the analyzer is more than one year old, additional adjustment and performance verification tests are required to ensure that some newly installed options are functioning properly. However, the completion of these tests does not guarantee that the analyzer meets all warranted specifications.

Description	Upgrade number	Additional information
Time domain scan	N9038AK-TDS	For Serial Prefix less than MY5322 or SG5322, option TDS also requires option N9038AK-HL4.
LISN control hardware	N9038AK-LSN	
Real-time analysis up to 85 MHz BW, basic detection	N9038AK-RT1	Includes frequency mask trigger (FMT) and time qualified trigger (TQT); minimum 3.7 μ s signal duration for 100% probability of intercept (POI); requires Option B85.
Analysis bandwidth, up to 85 MHz	N9038AK-B85	Provides real-time analysis bandwidth of up to 85 MHz below 3.6 GHz and 40 MHz above 3.6 GHz.
External mixing	N9038AK-EXM	Provides external mixing capability for all option 544 instruments and all option 503, 508 and 526 instruments with serial prefix \geq MY/SG 5526. Includes hardware and license key.
External mixing	N9038AK-HL6	Provides external mixing capability for all option serial prefix $<$ MY/SG 5526 503, 508 and 526 instruments with a serial prefix $<$ MY/SG 5526. Includes hardware and license key.

Related Literature

Keysight MXE EMI receiver

Publication title	Publication number
MXE EMI Receiver, Data Sheet	5990-7421EN
MXE EMI Receiver, Brochure	5990-7422EN

Evolving

Our unique combination of hardware, software, support, and people can help you reach your next breakthrough. **We are unlocking the future of technology.**



From Hewlett-Packard to Agilent to Keysight

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-2-23-17)

DEKRA Certified
 ISO 9001 Quality Management System

www.keysight.com/go/quality
 Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2015
 Quality Management System

This information is subject to change without notice.
 © Keysight Technologies, 2013 - 2017
 Published in USA, March 3, 2017
 5990-7419EN
www.keysight.com

myKeysight

myKeysight
www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
 Lower costs.

Keysight Services
www.keysight.com/find/service

Our deep offering in design, test, and measurement services deploys an industry-leading array of people, processes, and tools. The result? We help you implement new technologies and engineer improved processes that lower costs.



Three-Year Warranty
www.keysight.com/find/ThreeYearWarranty

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.



Keysight Assurance Plans
www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners
www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/mxe