

Impedance Matching for High Power Devices

Keysight Technologies and Maury Microwave

Impedance match your high power devices with active and hybrid load pull

Load pull measurements are used to study the response of a device-under-test (DUT) under multiple source and load impedances. By using these techniques designers can develop impedance matching networks for high power, non-linear devices, maximizing their power transfer, output power, gain and efficiency over a broad range of frequencies.


Traditional load pull measurements utilize a passive mechanical tuner to vary the impedance seen by the DUT. Mechanical tuners are simple, low cost and can handle high power. However they may be relatively slow to use, especially when multiple frequencies are to be investigated, and are intrinsically limited due to the losses incurred in the signal path. Since they can be physically large they may also be more difficult to integrate with on-wafer measurement systems.

Active load pull measurements use an external signal source to inject a signal into the output of the DUT in order to emulate the effect of a reflected signal. The system overcomes the problems encountered with mechanical tuners. However, these advantages come with a cost penalty due to the need for high power amplifiers in the tuning chain.

The solution is to use a combination of the two techniques, or hybrid load pull. A mechanical tuner is used to handle the high power levels at the fundamental frequency while active devices are used for the lower power harmonics.

Maury Microwave provides a range of passive, active and hybrid load pull solutions that utilize test instruments from Keysight Technologies, including the PNA-X microwave network analyzer. The PNA-X has wide power range, fast and accurate control of source phase,

- Impedance match for optimum device performance
- Use load pull for impedance matching high power devices
- Overcome limitations of traditional load pull techniques
- Combine active and passive techniques in hybrid load pull
- Uses Keysight PNA-X network analyzer and Maury tuners
- Develop impedance matching networks for high power, large signal devices

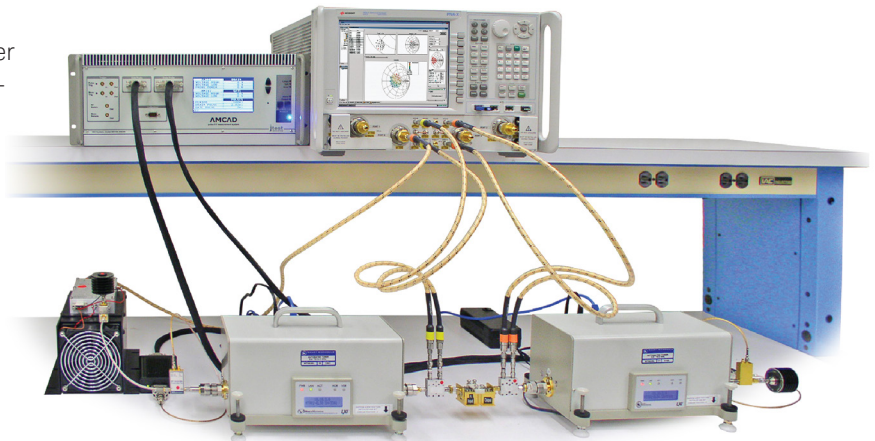

Impedance Matching for High Power Devices


clean harmonics, wide frequency coverage from 10 MHz to 50 GHz and a flexible test set to allow the connection of ancillary components.

By utilizing the advanced features of the Keysight PNA-X, Maury Microwave can provide cost-effective active and hybrid load pull systems to allow you to optimize the performance of your large signal, high power devices.



Impedance Measurements

The impedance presented at a DUT can be stated in various formats: ZL, VSWR and reflection coefficient, Γ_L . In the case of a two port device the magnitude of the reflection coefficient, Γ_L , is given by the ratio of the forward to the reflected travelling wave at port 2 (a_2/b_2).



With a passive load pull system the losses incurred in the mechanical tuner mean that the reflection coefficients that can be measured will always be less than 1 and typically in the range 0.8 and 0.92. An active load pull system overcomes this issue since the reflected signal is injected directly into the return path at point a_2 . As a result reflection coefficients of unity (and theoretically greater than unity) can be achieved.

System Components

Keysight Technologies

N524xA	PNA-X 4 port microwave network analyzer
N522xA	PNA 4 port microwave network analyzer

Maury Microwave

MT98x	Automated Impedance Tuner (0.227 MHz to 65 GHz coaxial)
MT930x	IVCAD measurement and modeling device characterization software

To learn how this solution can address your specific needs please contact Keysight's solutions partner, Maury Microwave
www.keysight.com/find/maurymw



Keysight & Solutions Partners
 Extending our solutions to meet your needs

Keysight and its Solutions Partners work together to help customers meet their unique challenges, in design, manufacturing, installation or support. To learn more about the program, our partners and solutions go to

www.keysight.com/find/solutionspartner

Maury Microwave has been in business for 50+ years and has become the world's leading manufacturer of laboratory devices and system components, with an emphasis on device characterization and automated tuning systems.

www.maurymw.com

For information on Keysight Technologies' products, applications and services, go to

www.keysight.com

This information is subject to change without notice

© Keysight Technologies, 2012-2016
 Published in USA, March 31, 2016
 5990-7639EN

www.keysight.com