# Keysight Technologies

PNA Microwave Network Analyzers for Pulsed-RF Measurements


E8362C 10 MHz to 20 GHz

E8363C 10 MHz to 40 GHz

E8364C 10 MHz to 50 GHz

E8361C 10 MHz to 67 GHz

Configuration Guide

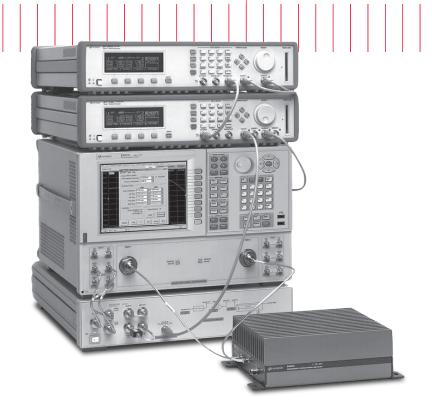



# Ordering Guide for Pulsed Measurements with the PNA Series

The following is a configuration guide for using the Keysight Technologies, Inc. microwave PNA Series network analyzers in a pulsed S-parameter configuration. This guide is specifically for pulsed-RF measurements, and is intended to serve as a supplement to the PNA Series configuration guide. Both guides are available on the Keysight PNA Series Web site: www. keysight.com/find/pna

## PNA Series Network Analyzers

Model Number	Frequency Range
E8362/3/4C	10 MHz – 20/40/50 GHz
E8361C	10 MHz – 67 GHz
Recommended PN	A options 1 for pulsed S-parameter measurements
E836xC-H08	Option H08 – Pulsed RF measurement capability Option H08 provides software for controlling the PNA and external pulse generators, for calculating the proper IF bandwidths for spectral nulling when using narrowband detection, and for profiling pulses in the time domain (magnitude and phase). Option H08 can be ordered alone, but Option H11 is needed for point-in-pulse and pulse-pro- file measurements.
E836xC-H11	Option H11 – IF access Option H11 provides IF switches that act as receiver gates, and are used for point-in- pulse and pulse-profile measurements. Option H08 is required to enable use of the gates. Option H11 also provides other hardware for use in antenna measurements (external IF inputs, and RF and LO outputs). Option H11 also requires options 014, 080, 081, and UNL.

## Pulsed S-parameter Test Sets

Model Number	Description	Frequency Range
Z5623A H81	Contains a pin-diode switch to modulate the network analyzer's internal source, an amplifier, and a directional coupler to provide a pulsed-RF reference to the analyzer. This test set provides pulsed measurements in the forward direction and CW measurements in the reverse direction.	2 – 20 GHz
Z5623A H83	Contains two pin-diode switches to modulate the network analyzer's internal source for forward and reverse measurements.	2 – 20 GHz
Z5623A H84	Contains two pin-diode switch to modulate the network analyzer's internal source for forward and reverse measurements.	20 – 40 GHz
Z5623A H85	Contains one pin-diode switch to modulate the network analyzer's internal source for forward measurements.	20 – 40 GHz
Z5623A H86	Contains one pin-diode switches to modulate the network analyzer's internal source for forward measurements. Also contains a band switch to select 2-20 GHz or 20-40 GHz bands.	2 – 40 GHz

Note: Pulsed biasing can be achieved with or without the use of a pulsed-RF S-parameter test set. A proper pulsed-bias source must be used. Contact your local Keysight Sales Representative for additional pulsed-RF S-parameter test set configurations.

#### Pulse Generators

Pulse generators are required to provide the baseband pulse signals used for timing to the pulsed-RF S-parameter test-set and the PNA. At least one of the pulse generators in the system must have a 10 MHz reference to lock to the PNA. The pulse generator output modules must also be able to drive the PNA IF gates (1  $k\Omega$  impedance) with TTL-level signals. The Keysight 81110A pulse/pattern generator must be ordered with the associated number of 81111A output modules depending on the measurement configuration.

Model Number	Number of output modules required	Description of module usage (i.e. what the output module would drive)	Pulsed measurements available (w-point-in-pulse)
81104/110A	-	80/165 MHz single- or dual-channel pulse/pattern generator	-
81105/111A	2	RF modulation; B receiver gating	S21 with ungated reference
	3	RF modulation; A and B receiver gating	S11, S21 with ungated reference
	3	RF modulation; R1 and B receiver gating	S21 with gated reference
	4	RF modulation; R1, A and B receiver gating	S11, S21 with gated reference
	52	RF modulation; R1, R2, A and B receiver gating	S11, S21, S12, S22 with gated references

Note: Gated reference means that the reference receiver measurement delay and width can be set independent of the measurement receivers' delay and width. A gated reference can be applied to a CW or pulsed-RF signal. Ungated reference means that no gating is applied to the reference receivers, which might have a CW or pulsed-RF signal.

For option details refer to the PNA Series Microwave Network Analyzers Configuration Guide, literature number 5989-7606EN available on the Web www.keysight.com/find/pna


<sup>2.</sup> Requires a pulsed-RF test S-perameter set with forward and reverse RF modulators.

# Measurement Configuration Example

The figure below shows a pulsed solution with IF gating providing point-in-pulse capability for the 'A', 'B', and 'R1' measurement receivers. The test set configuration provides pulsed RF in the forward direction and a CW (non-pulsed) signal in the reverse direction. This configuration also supplies a pulsed signal to the R1 reference receiver. Three outputs of the pulse generators are

connected to the receiver (A, B, and R1) gate drive BNC connectors on the rear panel of the PNA. One output is connected to the test set to drive the modulator. The 10 MHz reference of one of the pulse generators and the PNA are locked together by connecting cables to the BNC connectors. The PNA controls each pulse generator via GPIB.

## 81110A family pulse generators

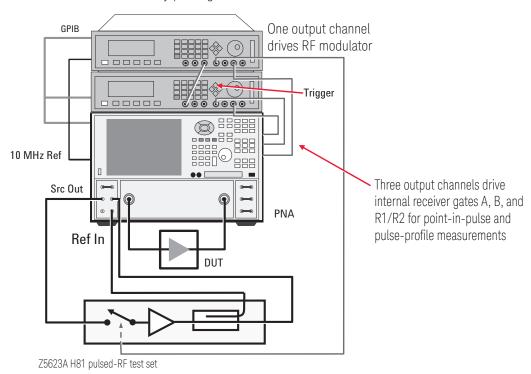

# Pulse Measurement Option Description

# Pulsed-RF measurement capability - Option H08

Provides software to set up and control pulsed-RF measurements with point-in-pulse and pulse-profile capability. The software sets the coefficients of the PNA's digital-IF filter to null out unwanted spectral components, enables the IF gates provided with IF access (Option H11), and controls the Keysight 81110A family of pulse generators. The software can be run on the PNA or an external computer, and a ".dll" file containing the IF-filter algorithm is included for automated pulsed-RF testing.

# IF access – Option H11 (requires options 014, 080, 081, UNL)<sup>1</sup>

Provides hardware to enable antenna, point-in-pulse, and pulse-profile measurements, as well as broadband millimeter-wave measurements to 110 GHz, and banded millimeter-wave measurements to 325 GHz. For each of the microwave PNA's measurement receivers, IF gates (enabled with pulsed-RF measurement capability Option H08) and external IF inputs are added. In addition, access to the PNA's internal RF and LO sources is provided for remote-mixing applications. For basic antenna measurements, only Option H11 is necessary. Pulsed- antenna applications also require the pulsed-measurement capability (Option H08). Millimeter-wave measurements also require an N5260A millimeter-wave test set controller.

For option details refer to the PNA Series Microwave Network Analyzers Configuration Guide, literature number 5989-7606EN, available on the Web www.keysight.com/find/pna

#### myKeysight

## myKeysight

#### www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

#### www.axiestandard.org



 $\label{eq:AdvancedTCA} \begin{tabular}{ll} AdvancedTCA^\circledR Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. $ATCA^\varOmega, AdvancedTCA^\varOmega, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group. \end{tabular}$ 

#### www.lxistandard.org



LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.

#### www.pxisa.org



PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

#### Three-Year Warranty



#### www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.

## Keysight Assurance Plans



#### www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.

#### www.keysight.com/quality



Keysight Technologies, Inc. DEKRA Certified ISO 9001:2008 Quality Management System

#### Keysight Channel Partners

#### www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

### www.keysight.com/find/pna

www.keysight.com/find/accessories

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

#### **Americas**

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

#### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

#### Europe & Middle East

Europe a middle Eust	
Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)

For other unlisted countries: www.keysight.com/find/contactus (BP-07-10-14)

0800 0260637

United Kingdom

