


# Keysight Technologies Stray Voltage Testing Made Easy With U1272A

Application Note



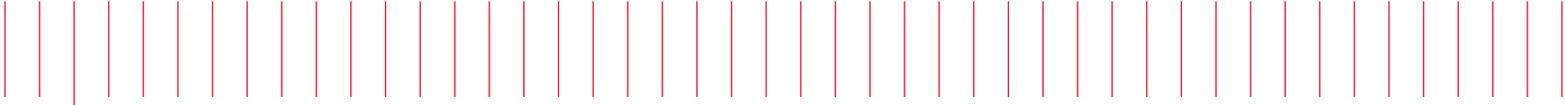

## Introduction

Stray voltage, sometimes referred to as ghost voltage, is a voltage that appears in an electrical conductor such as a wire, even though the wire is disconnected from an electrical circuit. Electricians and technicians frequently encounter stray voltages in electrical systems when measuring the AC voltage in electrical circuits that have been disconnected. Measuring the circuit using a high-impedance handheld digital multimeter can make it difficult to differentiate stray voltages from legitimate readings. In this situation, identifying and resolving the source of the stray voltage can cost time, effort, and money.

This application note presents an alternative tool for identifying the presence of stray voltages: the Keysight Technologies, Inc. U1272A handheld digital multimeter (HH DMM.) This paper also explains how the U1272A's ZLow feature makes it easy for technicians and electricians of every skill level to identify the presence of stray voltage in all types of electrical installations. To illustrate the differences in voltage measurement tools, this application note uses an actual situation in which stray voltage was identified.

## Finding Stray Voltage

As Figure 1 illustrates, an electrician is installing low voltage lighting in a warehouse office. The warehouse is equipped with two wires running in parallel to the conduit. One is for light A, which is ON, and the other pair of wires will be used by the electrician to install a new light using a new expansion cable that is running parallel with light A. Before beginning the installation, he checks the voltage on the wire using his high-impedance handheld multimeter (shown in blue in the illustration.) He obtains a reading of 40 V, even though the line is disconnected from the main switch. He suspects that touching conductors have formed a short circuit, causing voltage to leak through the conductor's insulation. However, after a thoroughly investigation, he finds no short circuit to ground.

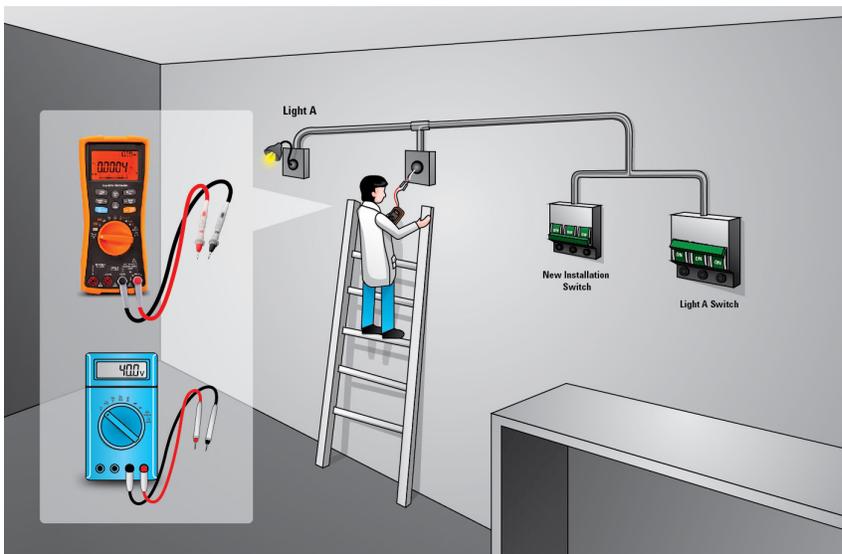


Figure 1. Electrician detects stray voltage on the unused connection with high input impedance multimeter (shown in blue).

## Stray Voltage Causes

Stray voltage readings, such as the one found by the electrician in our example above, can be caused by capacitive coupling of the energized conductors with unused wire that is running parallel and in close proximity. This capacitance increases as the length of the conductor increases. The longer the wire, the easier it is to detect stray voltage. Current in the active circuit can also trigger a stray voltage reading; the higher the current in the active circuit, the higher the stray voltage. Stray voltage readings caused by active circuits can range from a few volts to as high as the voltage of the adjacent conductors.

It should be noted that according to Underwriters Laboratories Inc. (UL), stray voltage is not real voltage and it cannot cause physical harm to a person. UL also states that care must be taken to ensure that the voltage reading is a stray voltage and not a result of a cable defect or improper installation; as such a situation may result to a shock hazard.

## Impedance versus Measurement Accuracy

Most handheld digital multimeters have high input impedance as compared to the impedance of the circuit being measured. These HH DMMs are designed to place very little load on the circuit under test and because of this, stray voltage is measured by the DMM. Typically these types of handheld multimeters have input impedance that is greater than 1 M-Ohm, and the input impedance varies depending on the DMM's design.

For working with electrical systems, low input impedance testers, such as a solenoid tester or the Wiggington tester, are preferred because they do not pick up stray voltage like some of the high impedance digital meters. However, with sensitive electronics, low input impedance will affect the current flowing through the circuit and can actually damage the components being tested or change the measurement reading.

If a low input impedance multimeter had been used to perform the AC voltage measurement in our example, the electrician would have found virtually zero stray voltage. This is because stray voltage is a physical phenomenon involving very small values of capacitance, it cannot energize a load.

## The Hybrid Solution

However, it is impractical and not cost-effective for electricians to carry both a high input impedance and low input impedance multimeter in order to identify stray voltage. Keysight's U1272A, with its unique  $Z_{Low}$  function, is a solution that allows users to switch from high input impedance mode to low input impedance mode to check for the presence of stray voltage.

The  $Z_{Low}$  function acts like a backup voltage indicator and eliminates the need to carry additional tools for troubleshooting. In the event that real voltage is measured using the U1272A's  $Z_{Low}$  function, the positive temperature coefficient (PTC) thermistor that is designed as an over current protection will ensure the multimeter always operates in high input impedance.

## Summary

As electrical and electronic systems become increasingly sophisticated, electricians and technicians tend to opt for more accurate and easy-to-use digital multimeters to efficiently and effectively perform their daily tasks. They want their tasks to be done safely, conveniently, and with reliable measurements. The Keysight U1272A is the right tool and is equipped with all the functionality and protection required in an industrial environment.

**myKeysight**

**myKeysight**

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



[www.keysight.com/quality](http://www.keysight.com/quality)

Keysight Electronic Measurement Group  
DEKRA Certified ISO 9001:2008  
Quality Management System

**Keysight Channel Partners**

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/industrial-DMM](http://www.keysight.com/find/industrial-DMM)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

**Americas**

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

**Asia Pacific**

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

**Europe & Middle East**

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-06-23-14)